




4C+E PVC Insulated Orange Circular Cables 0.6/1kV, Cu, Armoured

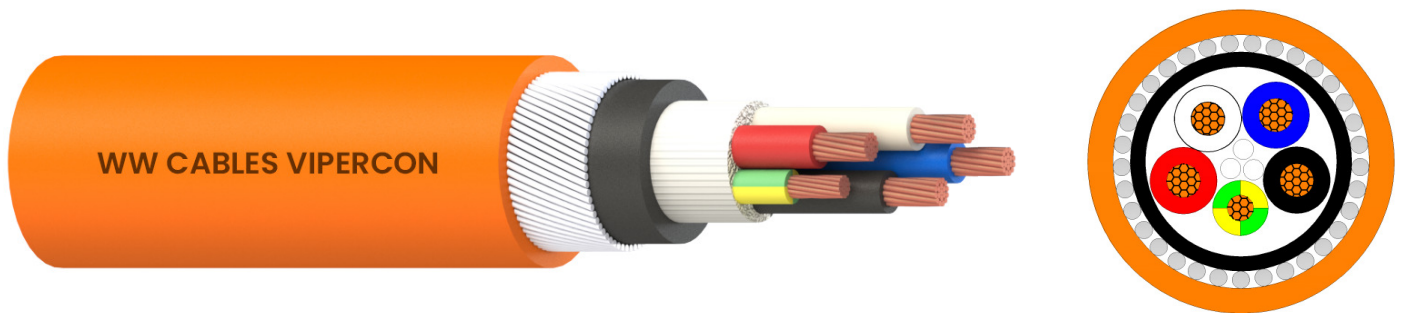

Note: The above drawing is for representation purpose only.

Description

Conductor:	Class 2 Plain Annealed Copper
Insulation:	PVC V-90
Bedding:	PVC 5V-90
Armour:	Galvanised Steel Wire Armour
Sheath:	PVC 5V-90

Core identification

Red, White, Blue, Black, Green/Yellow

Sheath Colour

Orange

Technical Data

Voltage Rating:	0.6/1kV
Operating Temperature:	-25°C to +75°C, Maximum 90°C*
	*Not subject to severe mechanical pressure at temperatures higher than 75°C.
Short Circuit Temperature :	160°C for 5 sec


Standards Compliance

AS/NZS 5000.1	AS/NZS 1660.5.6 (Equivalent to IEC 60332-1)
AS/NZS 3808	AS/NZS 1660.5.1 (Equivalent to IEC60332-3-24)
AS/NZS 1125	


Characteristics



FLAME RETARDANT



UV RESISTANT



-25°C ~ +75°C



GREEN STAR

The information in this specification is to be used as a guide only. World Wire Cables (Aust) Pty Ltd has taken all due care in compiling the information in this specification but accepts no responsibility for any errors or omissions. All information provided in this specification is covered by copyright.





4C+E PVC Insulated Orange Circular Cables 0.6/1kV, Cu, Armoured

Physical & Electrical Characteristics

WWC Product Code	Conductor Size (mm ²)	Conductor Diameter (mm)	Insulation Thickness (mm)	Earth Conductor Size (mm ²)	Approx. Overall Diameter (mm)	Min. Bending Radius (mm)		Approx. Weight (kg/km)
						During Installation	After Installation	
1505	1.5	1.56	0.8	1.5	15.7	297	198	470
1502	2.5	2.01	0.8	2.5	16.9	319	213	582
1504	4	2.55	1.0	2.5	20.0	378	252	886
1506	6	3.12	1.0	2.5	21.6	408	272	1162
1510	10	3.80	1.0	4	24.5	463	309	1452

Conductor Size (mm ²)	+Current-carrying capacity (A)				Maximum D.C. Resistance of conductor at 20°C (Ω/km)	Reactance at 50Hz (Ω/km)
	In Air Touching	In Air Enclosed	In Ground	In Ground Enclosed		
1.5	15	14	18	18	13.6	0.111
2.5	22	20	25	25	7.41	0.102
4	29	25	33	33	4.61	0.102
6	37	33	42	42	3.08	0.0967
10	51	44	55	55	1.83	0.0906

+Based on ambient air temperature of 40°C, soil temperature of 25°C, burial depth of 0.5m and soil thermal resistivity of 1.2K.m/W.

© World Wire Cables (Aust) Pty Ltd. All Rights Reserved.

The information in this specification is to be used as a guide only. World Wire Cables (Aust) Pty Ltd has taken all due care in compiling the information in this specification but accepts no responsibility for any errors or omissions. All information provided in this specification is covered by copyright.

